




-14

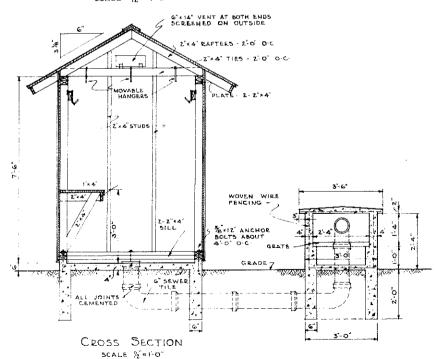



CONCRETE SHOULD BE REINFORCED WITH WOVEN WIRE FENCING & ADDITIONAL RODS AROUND BOORS. SCRAP RODS FREE FROM RUST MAY BE USED FOR THIS PURPOSE. THE TOP SHOULD BE REINFORCED WITH 3 - ½, RODS OR THEIR EQUIVALENT IN ADDITION TO WOVEN WIRE FENCING. DOORS MAY BE MADE OF SHEET METAL. DOORS MAY BE MADE OF SHEET METAL. DOORS FROM AN GLD HEATING STOVE WILL ANSWER, GRATES MAY BE MADE OF PIPES, RODS OR OLD STOVE OR FURNACE GRATES. IF IT IS DESIRED TO MEAT WATER ROR FED OR BUTCHERING A HOLE MAY BE MADE IN THE TOP SLAB OR THE TOP MAY BE REMOVED AND REPLACED WITH A SHALLOW VAT. USE A TEE CONNECTION IN PLACE OF THE BLOW AT THE BACK OF THE FIRE BOX PERMITTING A VERTICAL SMOKE PIPE WHICH WILL INCLEASE THE DRAFT & PACILITATE HEATING. MOYABLE HANGERS MAY BE MADE FROM THE ROUND RODS.

SIDE ELEVATION

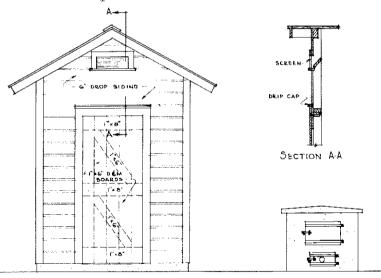

END ELEVATION

COOPERATIVE EXTENSION WORK IN AGRICULTURE AND HOME ECONOMICS

STATE OF NORTH DAKOTA
NORTH DAKOTA AGRICULTURAL COLLEGE

U. 5. DEPT, OF AGRICULTURE COOPERATING EXT. AGR'L ENGINEER FARGO, N. DAK.

WEST 751.1 33 EX. 5351 SHEET

FRAME SMOKE HOUSE

